

Installation Instructions


Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)

Please read instructions entirely before installing this product.

Part	Qty	Part	Qty
Driver Side Net	1	Rear/Center Net	1
Passenger Side Net	1	Strap Clips	48

<u>Step 1:</u> Loosely lay center section on vehicle. (The section with the grommets goes towards the rear of the vehicle.) Fig A

<u>Step 2:</u> Once center section is on, begin attaching straps to roll bar. (Do not fully tighten at this time. (Fig B) To connect the strap to buckles, slide the strap through the rear section upward and then back down through the front of it. (Fig C, D)

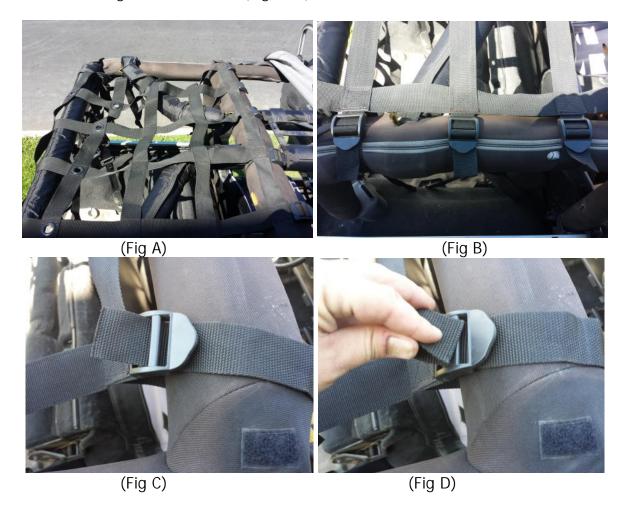



Installation Instructions

Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)

<u>Step 3:</u> Install rear side buckles (Fig E) onto roll bar. Wrap the Velcro straps around the roll bar in the approximate area where it will be installed. (Fig F) Then secure strap into buckle. (Fig G,H) Note the position of the limited slip buckle (Fig I, J) this should be on the inside of the female buckle to help reduce the strap buckle from moving.




<u>Step 4:</u> Once all of the rear side buckles are installed you can go ahead and attach them to the male buckles on the net.



Installation Instructions

Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)





(Fig J)

Step 5: Attach the rear bottom corner straps with J hooks to the underside of the body tub. (Fig K, L)





(Fig L)

<u>Step 6:</u> Once you have all of the straps on the center section loosely attached, go back and begin to pull all of them tight.



Installation Instructions

Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)





(Fig N)

<u>Step 7:</u> Loosely place one side section on vehicle. Fig N (Note the logo goes towards the rear of the vehicle).

<u>Step 8:</u> Once section is on, begin attaching straps to roll bar. (Do not fully tighten at this time.) (Fig O, P) To connect the strap to buckles, slide the strap through the rear section upward and then back down through the front of it. (Fig C, D)





(Fig P)



Installation Instructions

Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)

WWW.SMITTYBILT.COM


<u>Step 9:</u> Once all of the straps are loosely installed, position side piece into desired location and then proceed to fully tighten all straps. (Fig Q, R) Repeat on other side.





(Fig R)

<u>Step 10:</u> Once the net is on and all of the straps all pulled tight, install strap clips were needed or desired. These are designed to hold excess strap.

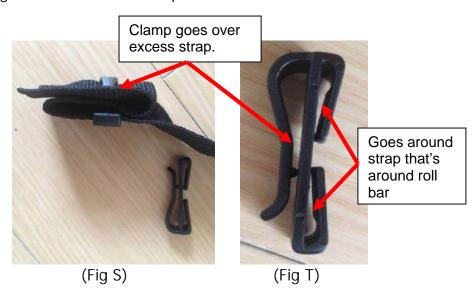

Installation is now complete. (Fig U)



Installation Instructions

Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)



(Fig U)

General Information

- > After vehicle has been driven a few times, go back and retighten straps. They may "settle" around roll bar after driving.
- Make sure no straps interfere with seat belts
- ➤ Net is not intended to reduce or avoid injury or damage in the event of an accident.
- ➤ Hardtop can be installed while net is installed.

Maintenance

The net should only be washed with soap and warm water. Do not use an abrasive cleaner or rag.



Installation Instructions

Part # 561135 CRED-HD 97-06 Jeep Wrangler (TJ)

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below. Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card. Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.