



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door

Please read instructions entirely before installing this product.

| Part | Qty | Part | Qty |
|-----------------------|-----|-----------------------|-----|
| Driver Side Net | 1 | Rear/Center Net | 1 |
| Passenger Side Net | 1 | Strap Clips (4 Door) | 36 |
| Strap Clips (2 Door) | 38 | Footman Loop | 2 |
| Strap Clips (4 Door) | 36 | Screw | 2 |
| Strap guard | 2 | | |

Note: Actual pictures may vary from specific vehicle. For the best fitment it is recommended to use with roll bar cover/padding kit around roll bar.

Step 1: Loosely lay center section on vehicle. (The section with the quick release buckles and grommets goes towards the rear of the vehicle.) Fig A

Step 2: Once center section is on, begin attaching straps to roll bar. (Do not fully tighten at this time. (Fig B) To connect the strap to buckles, slide the strap through the rear section upward and then back down through the front of it. (Fig C, D)



(Fig A)



(Fig B)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door



(Fig C)



(Fig D)

Note: The front center straps go around the sport bar and the hooks mount into the in the hole in the sound bar. (Fig E) On 4 doors there are rear straps that go around the rear O.E. sport bar. (Fig F)



(Fig E)



(Fig F, 4 Doors)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions


CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door

Note: Center straps have a grommet in each strap. This is used if you have a hardtop in place and want to keep the net tight while using the freedom top knobs that go into the sound bar. To use grommet holes install strap guard onto knob then install strap onto knob and re-install knob. Fig E2. When freedom panes are removed, the strap will attach to the hole in the sound bar with the hook end.

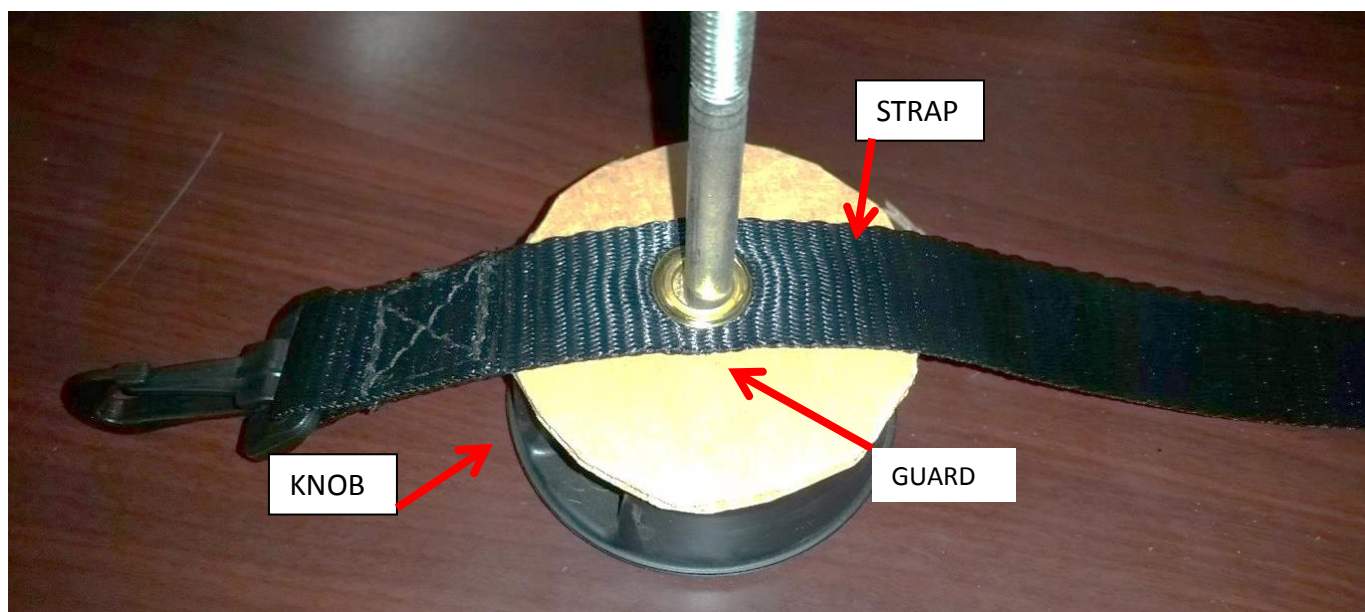

(Fig E2)

Step 3: Install rear side buckles (Fig G) onto roll bar. Wrap the Velcro straps around the roll bar in the approximate area where it will be installed. (Fig H) Then secure strap into buckle. (Fig I, J) Note the position of the limited slip buckle (Fig K,L) this should be on the inside of the female buckle to help reduce the strap buckle from moving.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door



(Fig G)



(Fig H)



(Fig I)



(Fig J)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door



(Fig K)



(Fig L)

Step 4: Once all of the rear side buckles are installed you can go ahead and attach them to the male buckles on the net.

Step 5: Attach the rear bottom corner straps with J hooks to the underside of the body tub. (Fig M, N) The strap facing the rear can also attach to the hooks (when equipped) on the floor of the vehicle. Depending on what accessories you may have in the rear you may not use both of these.



(Fig M)



(Fig N)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door

Step 6: Once you have all of the straps on the center section loosely attached, go back and begin to pull all of them tight. (Fig O)



(Fig O)



(Fig P, 4- Door)

Step 7: Loosely place one side section on vehicle. Fig P, Q (Note the logo goes towards the rear of the vehicle).



(Fig Q, 2 Door)



(Fig R)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door

Step 8: Once section is on, begin attaching straps to roll bar. (Do not fully tighten at this time.) (Fig R, S) To connect the strap to buckles, slide the strap through the rear section upward and then back down through the front of it. (Fig C, D)

To help keep the rear of the side sections in place (especially 4 Door Models) you can install the included footman loops on the back side of the rear sport bar or sport bar plastic surround with the included screws. If mounting on the actual roll bar (07-10JK) carefully mark and drill a 1/8" pilot hole first. The rear bottom strap of the side section would go through this footman loop in order to help prevent the side section from "riding up" when driving.

Note: On 4 Door models, fold back the carpet near the door striker and attach the "J" hook to the bottom of the brace plate (Fig T). Trim carpet if desired.

To help keep the rear of the side sections in place you can install the included footman loops on the back side of the rear sport bar or sport bar plastic surround with the included screws. If mounting on the actual roll bar (07-10JK) carefully mark and drill a 1/8" pilot hole first.



(Fig S)



(Fig T, 4-Door)

Step 9: Once all of the straps are loosely installed, position side piece into desired location and then proceed to fully tighten all straps. (Fig U, V) Repeat on other side.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door



(Fig U)



(Fig V)

Step 10: Once the net is on and all of the straps all pulled tight, install strap clips were needed or desired. These are designed to hold excess strap.



Installation is now complete. (Fig W, X)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

CRED-HD

2007-2015

Part # 571135 JK 2-Door

Part # 581135 JK 4-Door



(Fig W, X)

General Information

- After vehicle has been driven a few times, go back and retighten straps. They may "settle" around roll bar after driving.
- Make sure no straps interfere with seat belts
- Net is not intended to reduce or avoid injury or damage in the event of an accident.
- Hardtop can be installed while net is installed.
- Softop can be installed with net, though the straps on the front of the side pieces will need to be disconnected to allow room for bow assembly.

Maintenance

The net should only be washed with soap and warm water. Do not use an abrasive cleaner or rag.

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220