



**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

**Note:** Actual pictures may vary from specific vehicle.

Hardtop or soft top must be removed.

Will work with most aftermarket roll bar covers such as Smittybilt JL roll bar covers



For Technical Support/Warranty Information please call 310-762-9944  
Smittybilt, 400 W. Artesia Blvd Compton, CA 90220



**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**


**Parts list:**

- Front section
- Rear section
- L&R side curtains
- Tailgate tube
- Tailgate tube retainers (L&R)

**Note:** Actual pictures may vary from specific vehicle.  
Hardtop or soft top must be removed.

**Step 1.** Loosely lay front section on vehicle. The Smittybilt logo will be centered on the windshield and will be visible from the drivers seat.

**Step 2.** Attach straps around roll bar, start in front and begin the front most straps. Do not tighten fully. Fig 1.

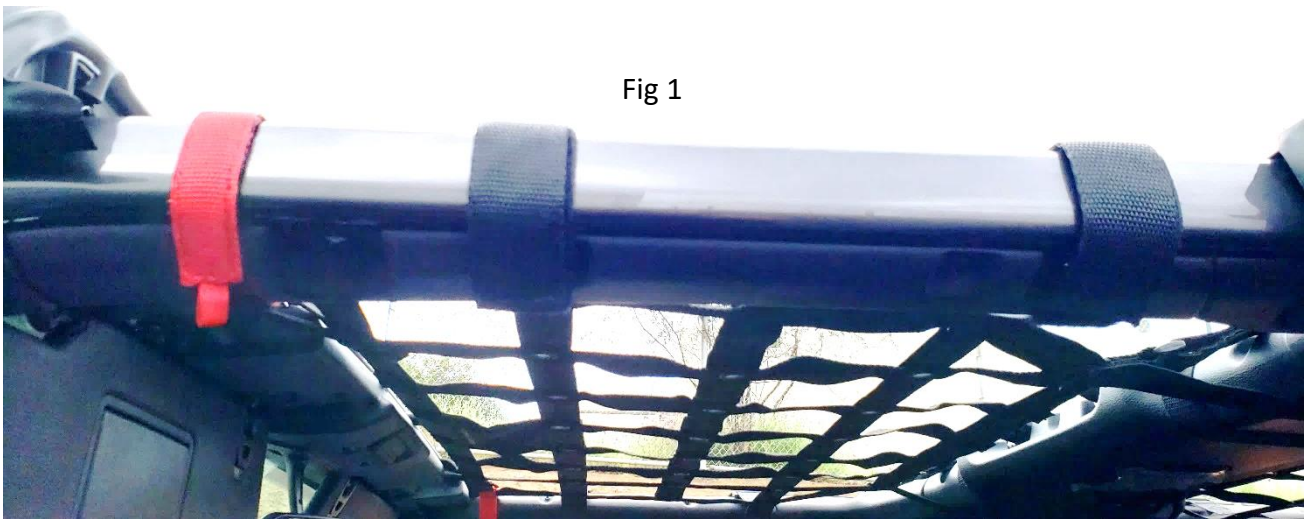

**Step 3.** Attach button straps by feeding through the top of the windshield bracket and out the bottom. Secure with the snap. Fig 2.



Fig 2

**Step 4.** Attach the remainder of the side straps loosely. Then make sure front straps are as far forward as possible and tighten both left and right straps evenly. Proceed to the middle straps, pull strapping towards rear to ensure tightness of netting and tighten both sides evenly. Continue to do the same procedure with the rear side straps. Fig 3.


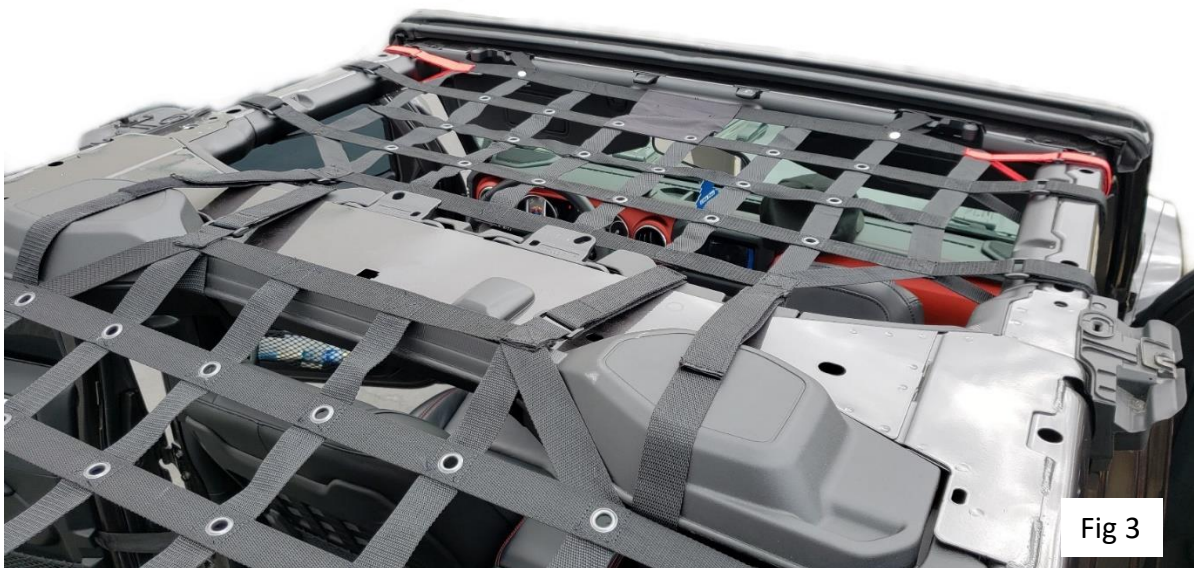


Fig 3



**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

**Step 5.** Attach the rear straps around the sound bar. These need to be snug but do not over tighten. Over tightening will cause the snap straps to come undone. Fig 4.

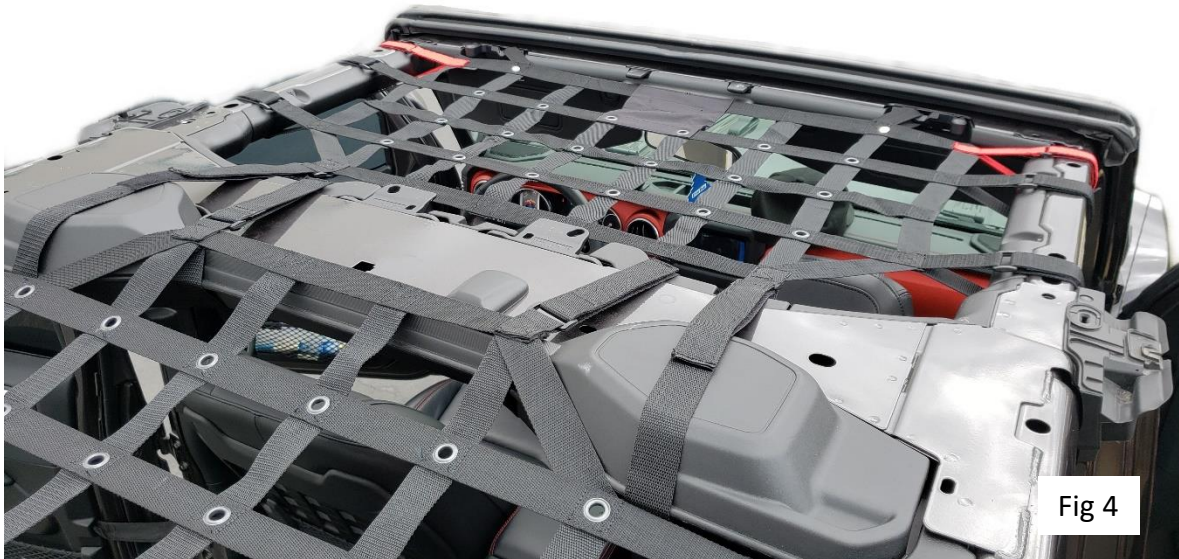

**Step 6.** Rear main netting should be attached securely around sound bar. Then loosely attach all side straps while your working your way back and over the rear roll bar. Front most side strap should be as close to the sound bar as possible. Tighten both front side straps evenly and work your way towards the back pulling the netting tight as you go back. Fig 5.






**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

**Step 7.** Continue down the rear of the roll bar following the same procedure you have done for the front of the net. The top strap will be placed above the seat belt bung on the roll bar. Fig 6.



**Step 8.** Attach the tail gate bar retainers to the corners of the body tub using hardware provided. Fig 7.

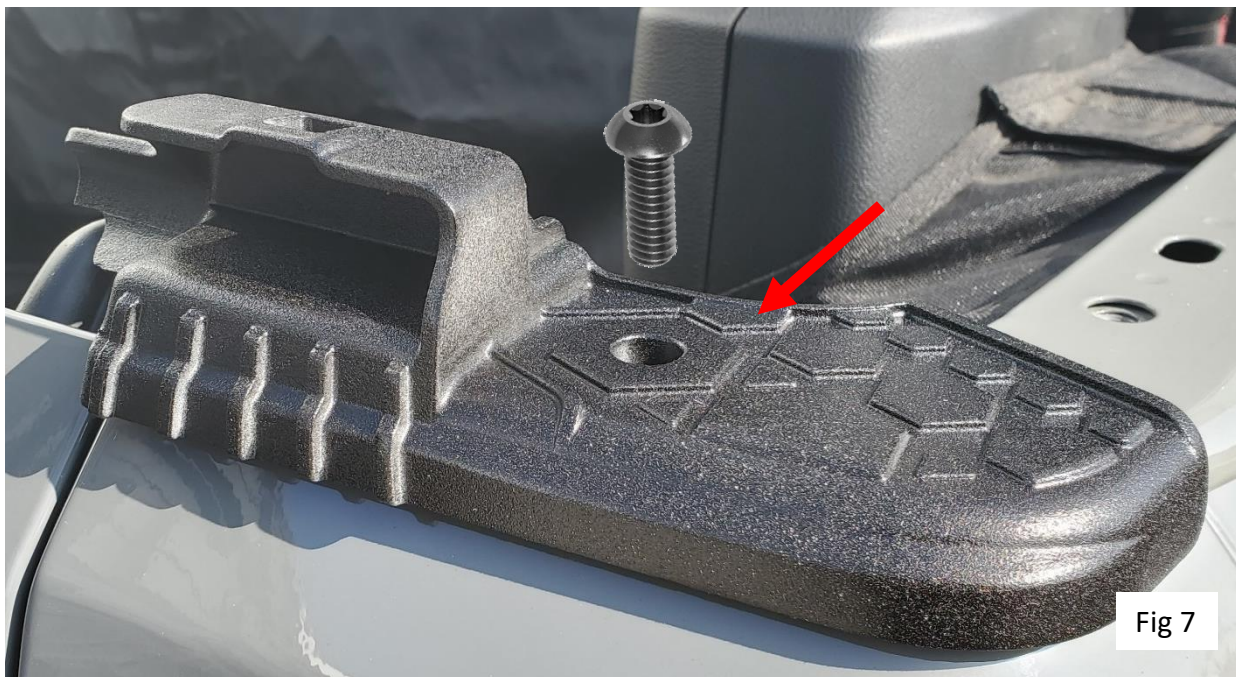



**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

**Step 9.** Connect the three pieces of the tailgate bar tube together, then insert through the loops at the end of the net. Open tail gate, then attach to the tailgate bar retainers. Tension of tailgate bar can be adjusted by tightening or loosening the netting. Fig 8.





**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

**Step 10.** Attach side netting around roll bar. The front most bottom hook should be clipped on the body tub directly behind the rear door rubber seal. The front top strap will be directly above it, tighten this strap first, then work your way back. The corner strap will go on each side of the rear cross bar and secure on the bottom side of the cross bar. Fig 10.



**NOTE:** The tail gate bar may also be used with factory tailgate bar retainers.





**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

**Step 11.** Long rear most strap will go down to the rear most footman loop on the floor, loop thru footman loop and back up to buckle. Fig 11.

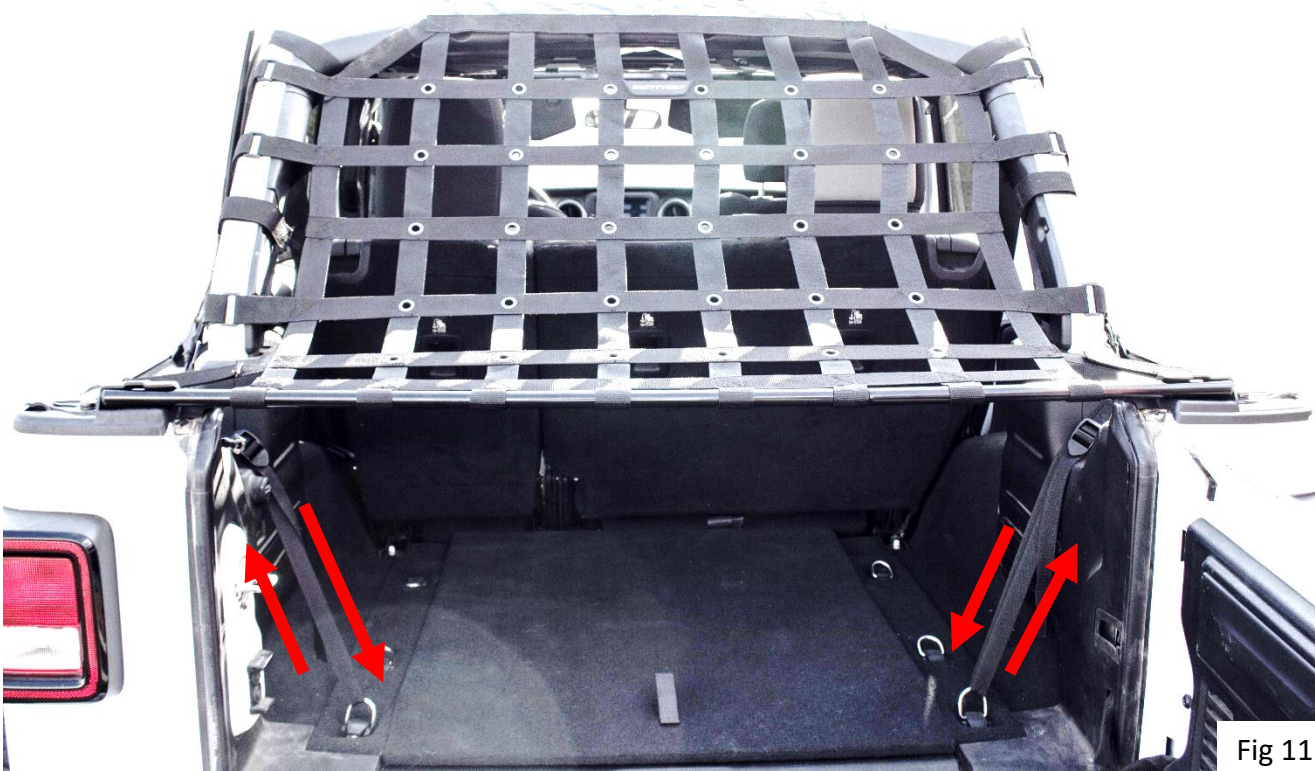


Fig 11

**Step 12.** You may have to periodically adjust tensions of straps, as they will stretch over time.





**Cres HD Install  
2018+ JL 4 Door  
Part # 587135**

### **Limited Warranties**

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

### **Warning**

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.