



WWW.SMITTYBILT.COM

Installation Instructions

JK Billet Fuel Door

Part#75007

07-16 JK 2+4 door



!Warning!

Always discharge static electricity by touching a metal part of the vehicle before removing gas cap. Do not re-enter vehicle, this may cause static build up. If you must re-enter vehicle, discharge static immediately after exiting vehicle away from the fuel filler.

!CAUTION!

- Billet gas door contains magnets.
- Magnets could affect the functioning of pacemakers, implanted heart defibrillators or other medical implants.
- If you wear these devices, keep sufficient distance from the magnets.
- Warn others who wear these devices from getting too close to magnets.
- Keep away from electronics and magnetic storage media.
- Do not ingest magnets. If ingested, immediately seek medical attention.

Step 1: Remove OE/factory fuel cap, this will be re-used.

Step 2: Remove the two right hand screws that attach the driver side taillight. Then push the light towards the passenger side and remove light. Disconnect wires or place taillight in safe location such as the bumper.

Step 3: The OE fuel cover is held in with plastic clips(4). Gently pry the clip tabs inwards to allow it to release from the vehicle. It is helpful to gently pull on the fuel cover from the outside. The two rear most clips should be easy to get to, the front two may be difficult to release, if so, gently work the fuel cover out. You may use a small pick or screwdriver to release the front clips

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W. Artesia Blvd Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions


JK Billet Fuel Door

Part#75007

07-16 JK 2+4 door



Gently pull on fuel cover, you can use a small pick to release the front clips if needed.

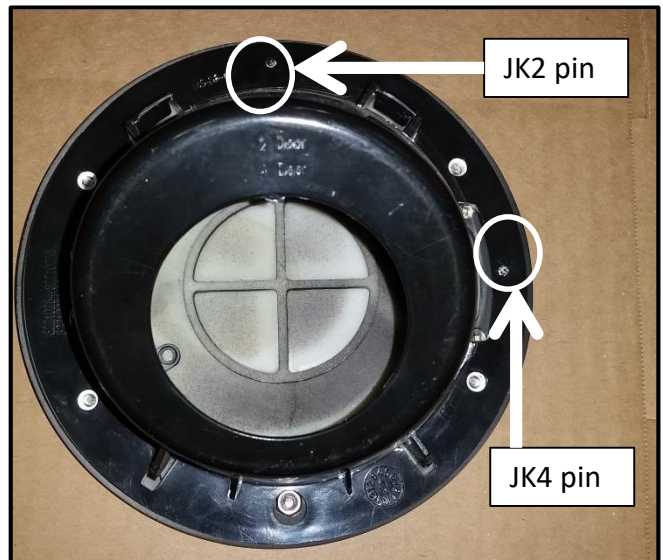

Step 4: You will notice a small hole on the body of your jeep where a pin on the fuel cover will fit into. Your new billet fuel door base will have 2 pins. You will remove one for your application. 2 door and 4 door vehicles have different pin locations, 4 door uses the pin in the 9 o'clock position. Remove the one that does not line up with your application. Do not worry if both pins are accidentally removed. The fuel door base will still stay securely attached to vehicle without them. Make sure the pin you remove is cut flush with the flat mounting surface.

Step 5: Remove gas cap lanyard and filler tube gasket from OE fuel cover. Reinstall filler tube gasket and gas cap lanyard on billet fuel door housing.

Step 6: Make sure pin is lined up with pin hole and slide filler tube into gasket, then push fuel door base onto the body till all 4 plastic clips are engaged and secure. If you find that the clips are not securing, you may gently press on them with a screwdriver to help seat them.

Step 7: Attach billet cover to base using the provided screws. Light duty thread locker is recommended. Make sure all 6 bolts are snug. Do not over tighten.

Step 8: Re-install tail light. Do not over tighten taillight hardware.



WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov

Jeep® and Wrangler® are registered trademarks of Chrysler