



Installation Instructions:

(Part # SB77835)
JEEP JL APOLLO FLARES

NOTE: Carefully read entire instructions thoroughly before attempting to install this part. Chock all 4 wheels if doing install without removing wheels.

Parts Included	Qty	ID
Driver Side Front Fender	1	
Passenger Side Front Fender	1	
Smittybilt air outlet covers	2	
Rubber Trim	2	
Threaded Plated	14	
M6 X 25mm BHCS	6	


Parts Included	Qty	ID
M6 X 15mm BHCS	14	
M6 Washer	14	
M6 Nuts	14	
M6 Split Washers	14	
M8 X 25mm Hex Bolts	6	
M8 Lock Washer	12	
M8 Washer	6	
M8 Nuts	6	

INSTALLATION:

Step 1: Break your front wheel lugs loose, place your floor jack under the front axle and raise the vehicle. Place jack stands under the front axle and lower the vehicle onto the jack stands. Remove the jack and remove the front wheels.

Step 2: Starting on one side of the vehicle, remove your O.E fender liner, remove (7) plastic retaining clips using body clip pliers or a flat-head screw-driver and remove (3) 10mm bolts (Fig. A-D).




NOTE: *The fender liner will come off with the fender as one assembly.*

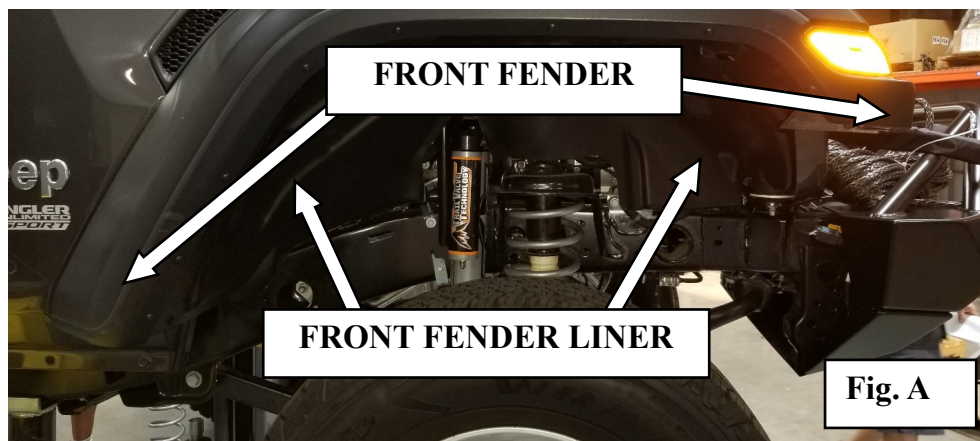

For Technical Support/Warranty Information please call 310-762-9944

Installation Instructions:

(Part # SB77835)
JEEP JL APOLLO FLARES

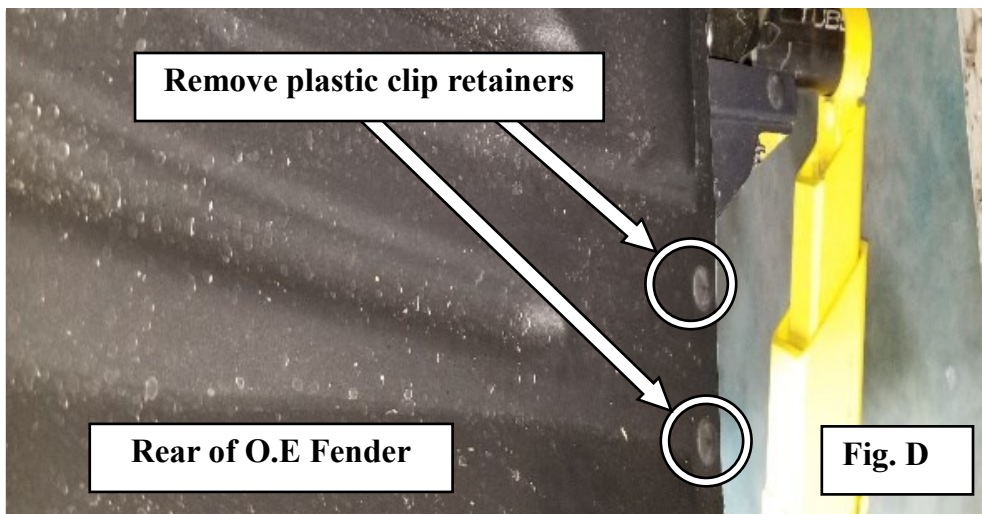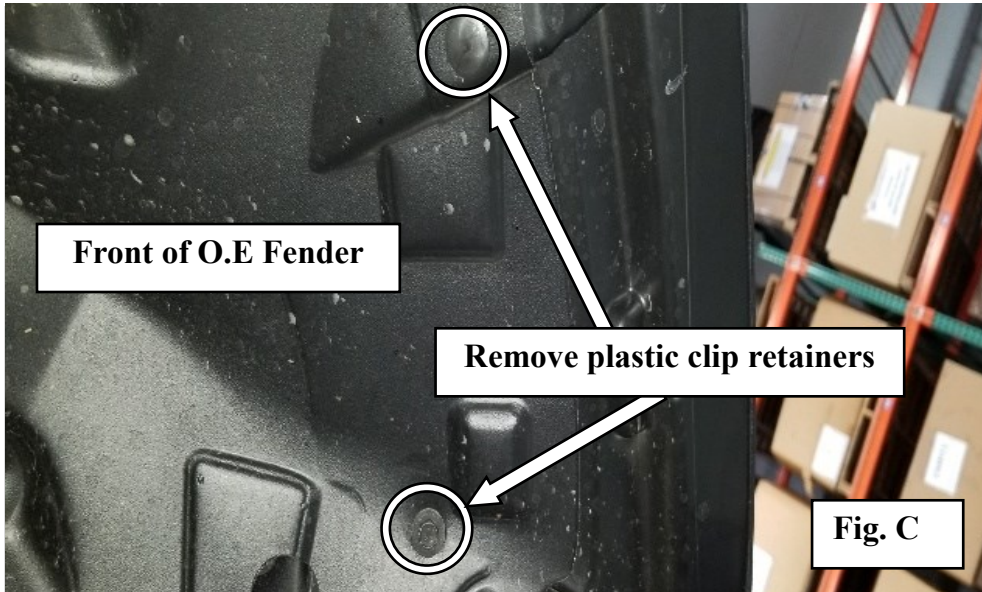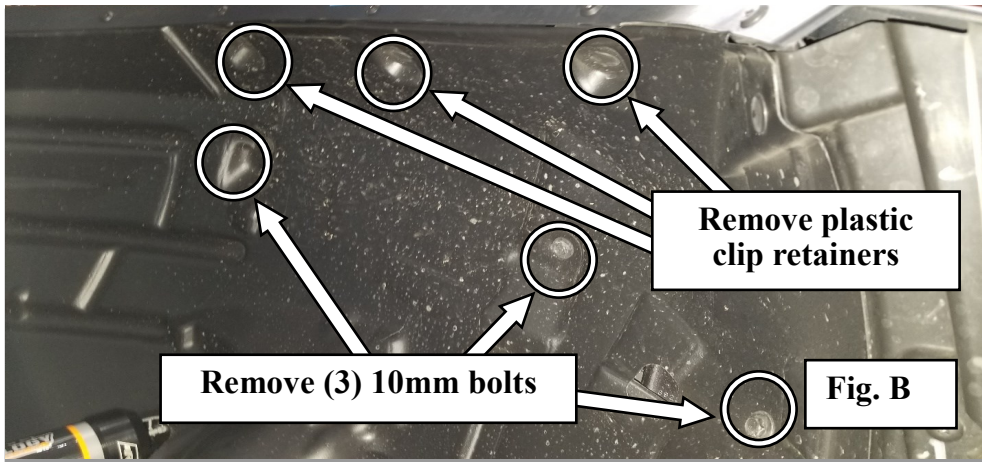


For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:

(Part # SB77835)
JEEP JL APOLLO FLARES

Step 3: Disconnect the front turn signal connector from the O.E fender. With the fender liner out of the way Remove the **(2) 10mm** O.E bolts located behind the turn signal bezel securing the O.E front fender in place **(Fig. E)**.

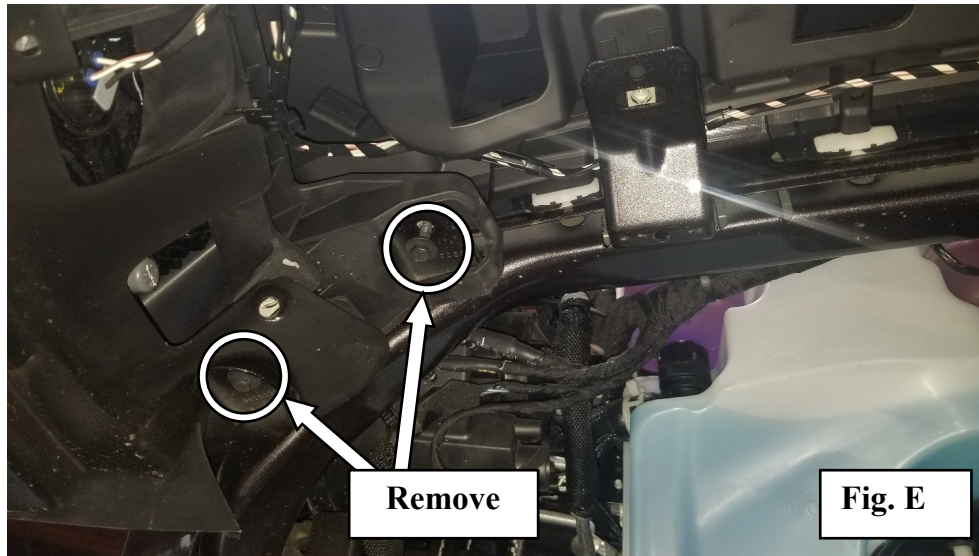

Step 4: With the O.E hardware removed, remove your O.E fender and fender liner. Starting from the front working toward the rear, pull firmly outward to remove the fender from the body of the vehicle **(Fig. F)**.



NOTE: *You will hear cracking/ popping noises, this is normal, it's from the clips snapping (they will not be reused).*



For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220



Installation Instructions: (Part # SB77835) JEEP JL APOLLO FLARES

Step 5: Remove the O.E front fender air outlet plate, using needle nose pliers, pinch the three plastic clips behind the body panel (**Fig. G-1 & G-2**).

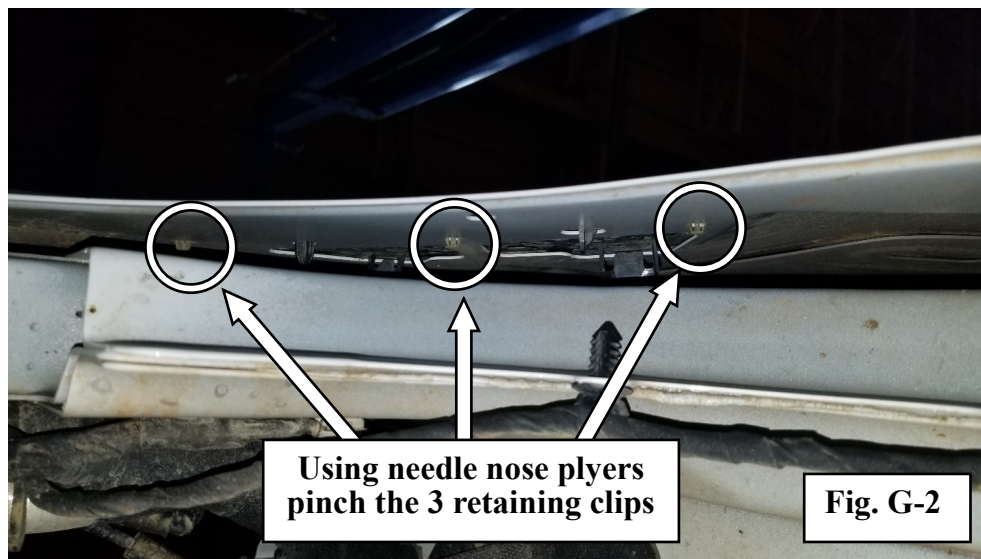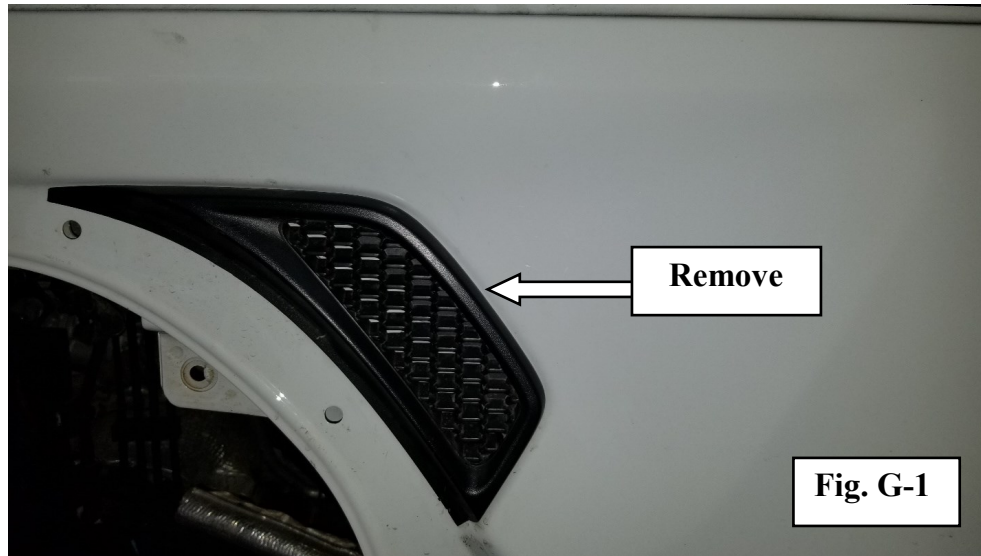


For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220




Installation Instructions: (Part # SB77835) JEEP JL APOLLO FLARES

Step 6: Remove adhesive from smittybilt badge install too front fender outlet plate and install using the (2) 6mm provided hardware. Passenger and driver (**Fig. H**).

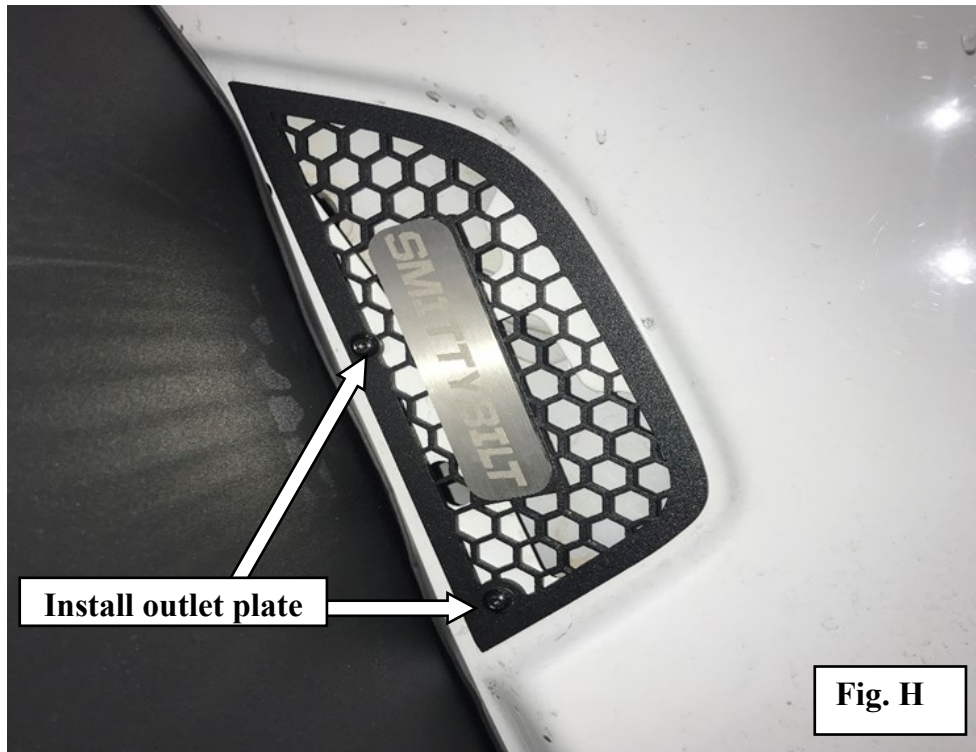

Step 7: Moving to the fender install the provided rubber trim to the back edge of the fender. Trim off any excess rubber (**Fig. I & J**).

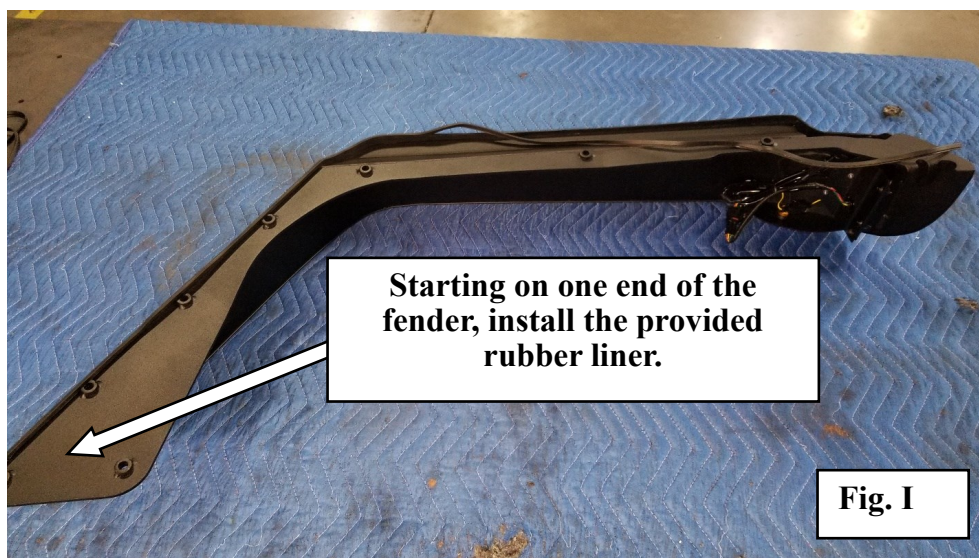


For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions: (Part # SB77835) JEEP JL APOLLO FLARES



Step 8: “This will require two people.” Install the **Apollo Fender**, start by lining up the fender with the O.E body panel holes, loosely install two of the provided M6 bolts with the nut plate on the back. Loosely install the remaining hardware to the fender (**Fig. K**).

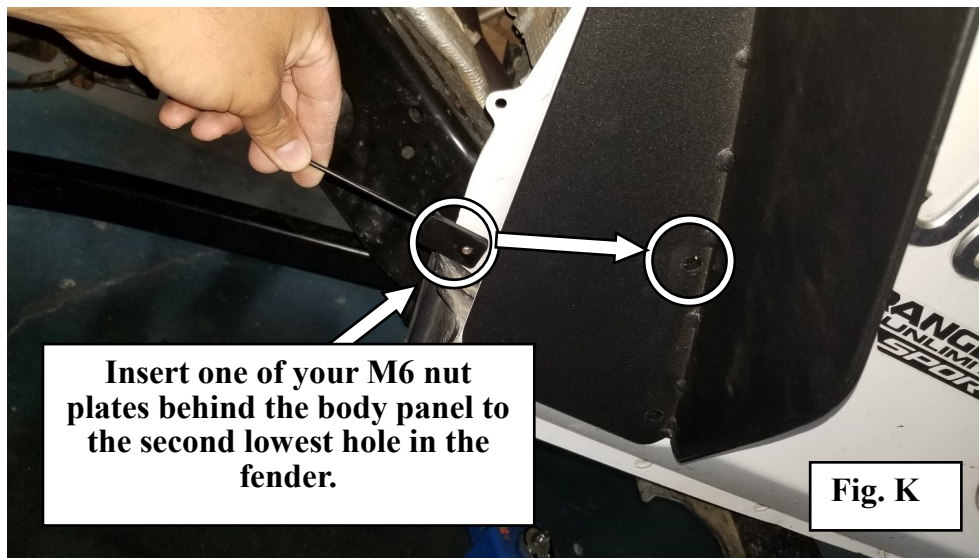


Step 9: With all the hardware loosely installed, level your **Apollo Fender** and secure all the hardware and connect the provided turn signal to the O.E turn signal wire harness on the vehicle zip tie wires away from any moving parts (**Fig. L**).

For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions: (Part # SB77835) JEEP JL APOLLO FLARES

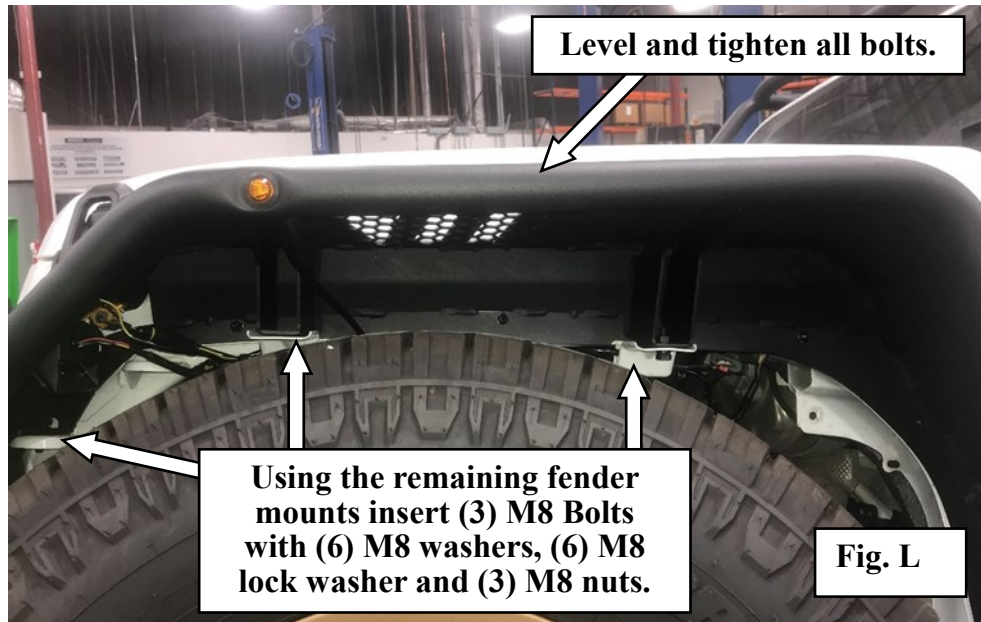

Step 10: Repeat **STEP 3-9** on the remaining side of the vehicle to complete the installation of your **Apollo Fender Flare**.

Step 11: Reinstall the front wheels and lower the vehicle to the ground. Torque the wheels to factory specifications.

Step 12: Installation of front fender is now complete (**Fig. M**).



For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:

(Part # SB77835)
JEEP JL APOLLO FLARES

Use this only as a guide for hardware without a called out torque specification in the instruction manual.

Bolt Torque and ID						
Decimal System			Metric System			
All Torques in Ft. Lbs. Maximums						
Bolt Size	Grade 5	Grade 8	Bolt Size	Class 9.8	Class 10.9	Class 12.9
5/16	15	20	M6	5	9	12
3/8	30	45	M8	18	23	27
7/16	45	60	M10	32	45	50
1/2	65	90	M12	55	75	90
9/16	95	130	M14	85	120	145
5/8	135	175	M16	130	165	210
3/4	185	280	M18	170	240	290

1/2-13x1.75 HHCS

Grade 5 Grade 8
(No. of Marks + 2)

D T L X

M12-1.25x50 HHCS

P

D T L X

G = Grade (Bolt Strength)
 D = Nominal Diameter (Inches)
 T = Thread Count (Threads per Inch)
 L = Length (Inches)
 X = Description (Hex Head Cap Screw)

P = Property Class (Bolt Strength)
 D = Nominal Diameter (Millimeters)
 T = Thread Pitch (Thread Width, mm)
 L = Length (Millimeters)
 X = Description (Hex Head Cap Screw)

For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:

(Part # SB77835)
JEEP JL APOLLO FLARES

Product cleaning and maintenance instructions

Stainless Steel Finish – Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap, window or glass cleaner may be used to clean the finish. Dual state powder coat finish – Mild soap, window or glass cleaner may be used to clean the finish. In order to protect the finish, you may wax your product on a regular basis with pure carnauba automotive wax. Do not use any types of soap, polish or was that contains abrasive that could damage the finish. Textured coated finishes should be cleaned with a mild soap on a damp sponge. Do not apply polish or was that requires to be removed by means of buffing. This type of wax is commonly used at car wash facilities. Chrome Finish – Mild soap, window or glass cleaner may be used to clean the finish. In order to protect the finish, you should wax your product on a regular basis with pure carnauba automotive wax. Do not use any types of soap, polish or was that contains abrasive that could damage the finish.

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220