




WWW.SMITTYBILT.COM

Installation Instructions
Part# 91406
4 door JK Door surrounds
2007-2018

Note: If using door surrounds with a bowless, frameless, extended top or bikini top, remove the latch lever from the door surround for better appearance and ease of top install. This is done by un-hooking the spring from the door surround, then unscrew the latch lever bolt using phillips head screwdriver and open end wrench. See below.

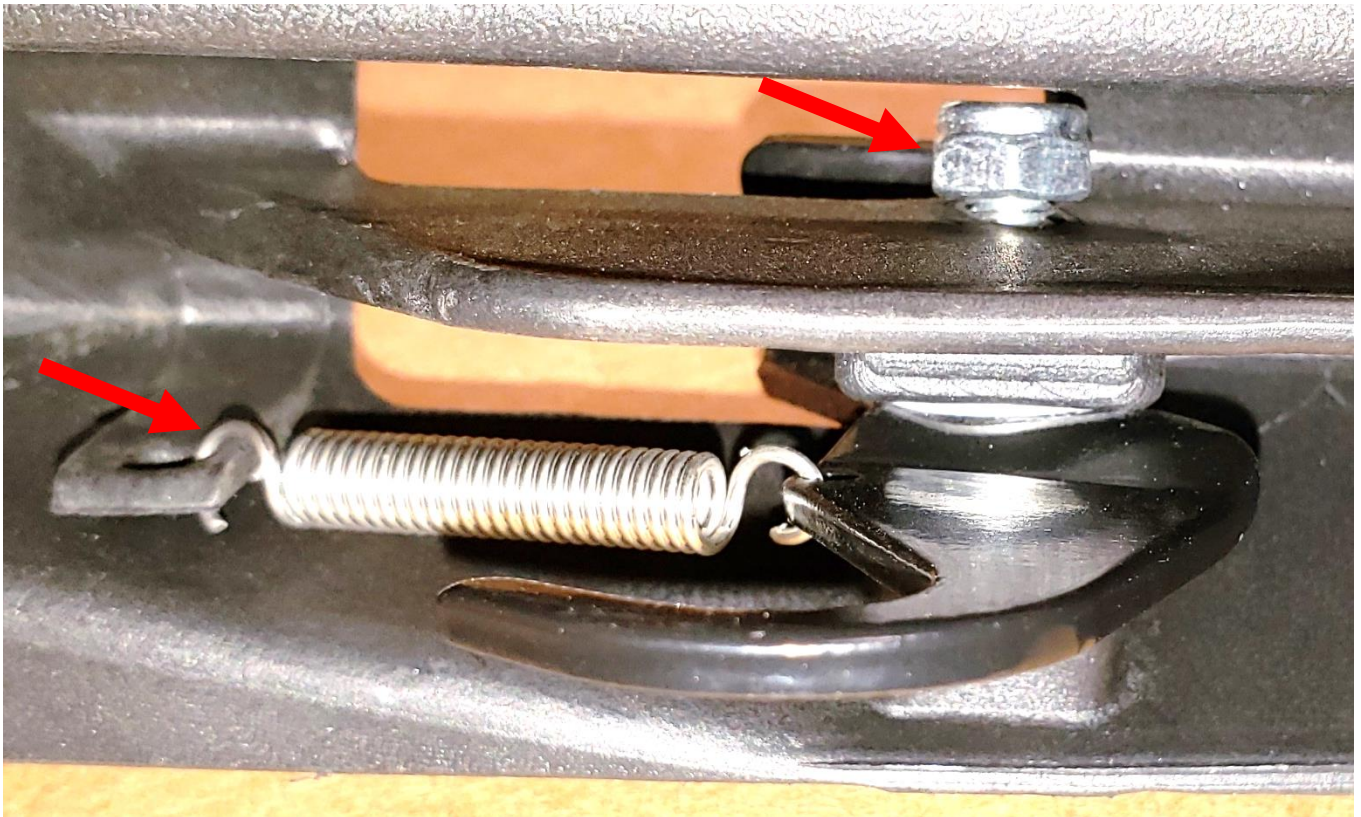

For Technical Support/Warranty Information please call 310-762-9944
Smittybilt, 400 W. Artesia Blvd Compton, CA 90220