



WWW.SMITYBILT.COM

Installation Instructions
Cloak extended mesh top
Part# 97500

NOTE: Carefully read entire instructions thoroughly before attempting to install this part. Photos are for illustration purposes and actual product may vary. Install remains the same

Add a secure, quick deployment mesh top to your arsenal of off-road survival items. The cloak extended mesh top can be installed in minutes over your factory roll bar and can stay installed when your hardtop is in place. Front and rear passenger areas zip open and can be stowed in the pocket above the sound bar for a completely topless experience.



Note: Yellow straps are for illustration only. Your Cloak Mesh Top will be outfitted with red straps to accent the red interior found in a majority of the JL Wranglers.

For Technical Support/Warranty Information please call 310-762-9944
Smittybilt, 400 W. Artesia Blvd Compton, CA 90220



WWW.SMITYBILT.COM


Installation Instructions

Cloak extended mesh top

Part# 97500

Step 1: Remove hard top or lower soft top and remove door surrounds. Locate the front of the top by wrapping the front red straps around the roll bar as close to the windshield as possible. Make sure the left and right straps are tightened down equally. The center mounted Smittybilt logo should face down so it can be seen from the passenger compartment. Make sure the logo is centered on the OE top hold down bracket, The top will be secured the hard top center bracket at the end of the install. Fig A

Step 2: Extend the top all the way back and over the rear sound bar. Loosely secure rear of top with the 4 rear roll bar center straps (FigA) and roll bar corner straps. Fig B. You will notice that the straps line up with the cut outs in the rear of the roll bar.

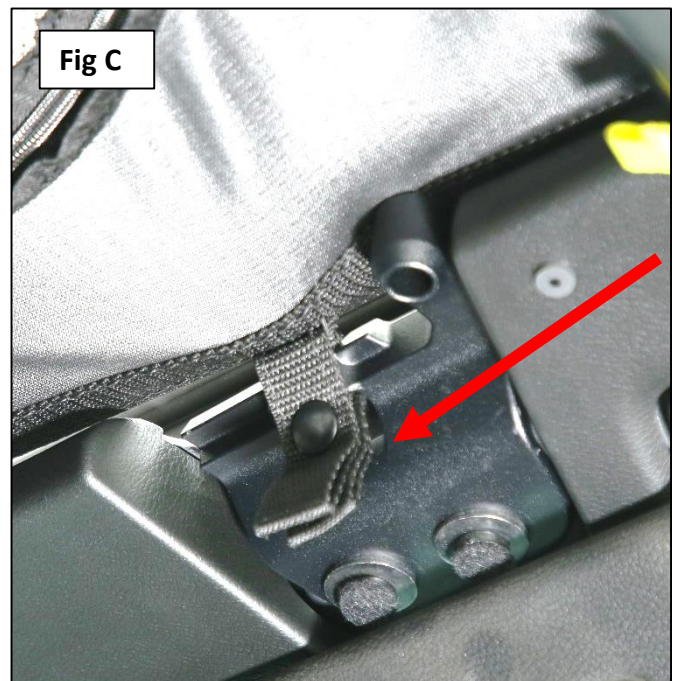

Step 3: Secure the two windshield bracket straps on both sides of the Jeep. Feed the long part of the strap thru the bracket on the windshield and snap them together. You may loosen the red straps to allow easier fastening of these straps. Be sure to re-tighten red straps. Fig C.




WWW.SMITYBILT.COM

Installation Instructions
Cloak extended mesh top
Part# 97500

Step 4: Wrap center sound bar straps around sound bar and tighten. These need to be just snug and they will tighten the front half of the top. Fig D.



Step 5: Loosely wrap the rear side roll bar straps, 3 per side. Ensure top is evenly spaced from left to right. Fig E.

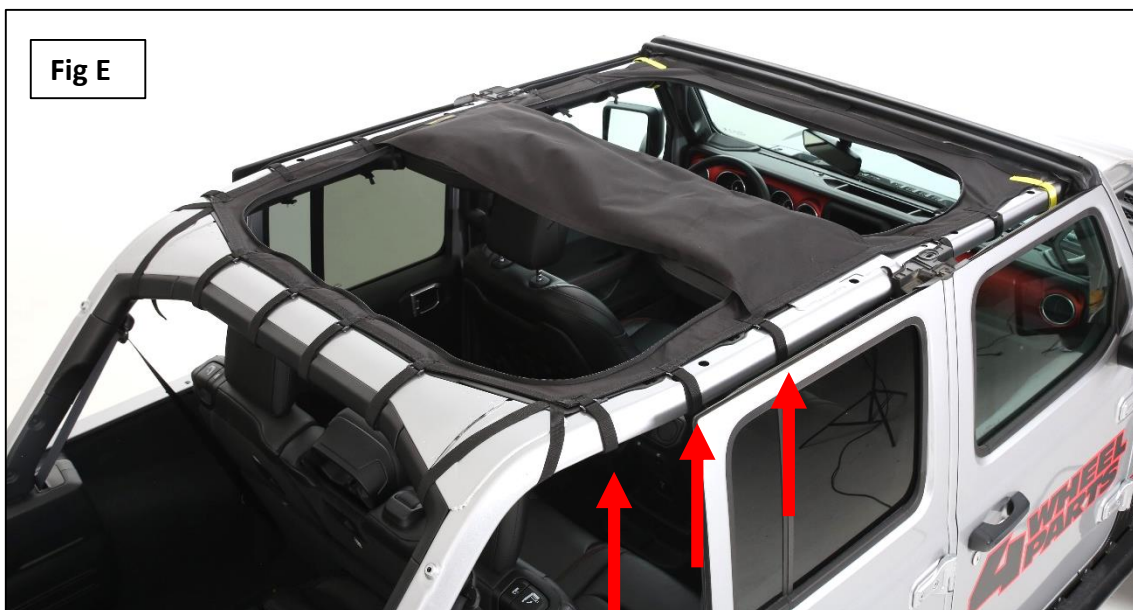



WWW.SMITYBILT.COM

Installation Instructions
Cloak extended mesh top
Part# 97500

Step 6: Tighten all straps and ensure top is evenly spaced from left to right. Then apply the front center Velcro pad to the windshield. Ensure bracket is clean by cleaning with rubbing alcohol before applying Velcro. Let Velcro adhesive cure for 24 hours before attaching mesh top to Velcro. Fig F.





WWW.SMITYBILT.COM

Installation Instructions
Cloak extended mesh top
Part# 97500

Mesh top features zippers front and rear for a topless experience. Simply unzip flap and stow flap in the pouch over the sound bar. Pouch will Velcro closed when the entire flap is stowed into the pouch.





WWW.SMITTYBILT.COM

Installation Instructions

Cloak extended mesh top

Part# 97500

Note: If you are going to install a hard top on top of the mesh top, loosen front red straps and disconnect the button straps that tie into the windshield brackets. Unzip and stow front section of the mesh top and make sure the freedom panels can latch without interference of the mesh top, tuck mesh top below the windshield brackets. Ensure mesh top does not cover the freedom panel locating holes in the front of the roll bar. Fig G





WWW.SMITYBILT.COM

Installation Instructions
Cloak extended mesh top
Part# 97500

Limited Warranties

Smittybilt's products are covered under the following limited 1 year warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the 1 year duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.