



WWW.SMITYBILT.COM

Installation Instructions
Cloak mesh Sides and Rear
Part# 97501

NOTE: Carefully read entire instructions thoroughly before attempting to install this part. Photos are for illustration purposes and actual product may vary. Install remains the same.



For Technical Support/Warranty Information please call 310-762-9944
Smittybilt, 400 W. Artesia Blvd Compton, CA 90220



Installation Instructions
Cloak mesh Sides and Rear
Part# 97501

Step 1: Loosely attach upper side corners of the rear mesh. Make sure straps are adjusted equally on both sides. Fig 1



Fig 1



Fig 2

Step 2: Attach the top roll bar straps ensuring mesh is centered. This is easily accomplished by placing the two center most straps on the edge of the dome light. Fig 2



WWW.SMITTYBILT.COM

Installation Instructions Cloak mesh Sides and Rear Part# 97501

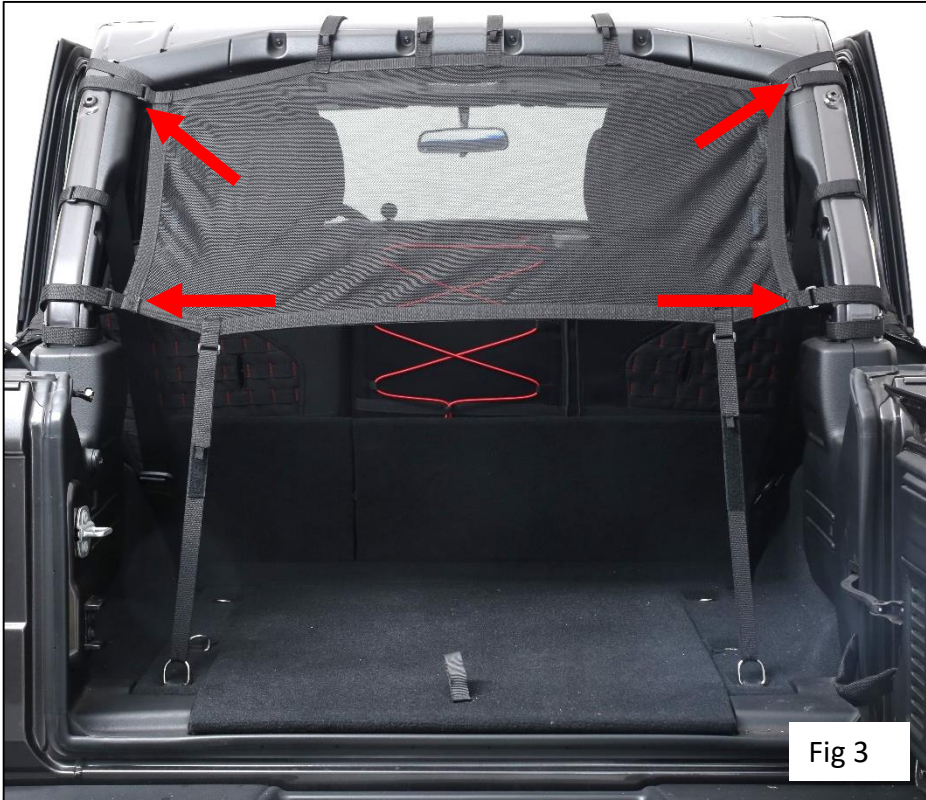


Fig 3

Step 3: Attach the remaining side roll bar straps ensuring mesh is centered. Then re-tighten the upper side roll bar straps. Fig 3



Fig 4a

Step 4: Attach the bottom straps thru the footman loops on the floor of the jeep then back up to mesh and secure by running it through top loop and secure with Velcro. Fig 4a and 4b.



Fig 4b



WWW.SMITYBILT.COM

Installation Instructions
Cloak mesh Sides and Rear
Part# 97501

Step 5: Locate the front of the side mesh. The Smittybilt logo will be towards the rear where the roll bar mounts to the body. The front lower hook will be placed under the rubber seal on the body tub. Fig 5. Then attach top strap around roll bar. Fig 6





Installation Instructions

Cloak mesh Sides and Rear

Part# 97501



Step 6: Attach corner strap by putting each strap over the roll bar and securing them on the inside corner of the roll bar. Do not fully tighten. Fig 7.



Step 7: Attach the rear body tub hook and then attach the roll bar strap that is above the Smittybilt logo. Do not fully tighten. Fig 8.

Step 8: Install the last strap as low on the roll bar as possible. Then even tighten all straps for a tight and even fit. Fig 8.

Note: As the fabric heats up from the sun, it will stretch more and the wrinkles will disappear. Adjust straps as necessary.



WWW.SMITYBILT.COM

Installation Instructions
Cloak mesh Sides and Rear
Part# 97501

Note: Mesh can be cleaned by hand washing only. Use mild soap and warm water only. Place in bucket and allow to soak for 10-15 minutes. Stubborn areas can be brushed lightly with a soft brush. Do not use any harsh chemicals. Rinse soap out completely and allow to air dry out of direct sunlight. Do not use high pressure water to clean top. Damage will occur.

Limited Warranties

Smittybilt's products are covered under the following limited 1 year warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the 1 year duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.